

Centralized Power Control in Cellular Radio Systems

Sudheer A. Grandhi, Rajiv Vijayan, David J. Goodman, *Fellow, IEEE*, and Jens Zander, *Member, IEEE*

Abstract—This paper describes a centralized power control scheme for cellular mobile radio systems. The power for the mobiles in the scheme proposed here is computed based on signal strength measurements. All the mobiles using the same channel in this scheme will attain a common carrier-to-interference ratio. The proposed scheme is analyzed and shown to have an optimal solution.

I. INTRODUCTION

TRANSMITTER power is an important resource in cellular mobile radio systems. When used effectively it can increase system capacity and quality of communications. A commonly used measure of the quality of communications is the carrier-to-interference ratio (CIR) at the receiver. The central idea in power control schemes is to maximize the minimum CIR in each of the channels in the system. Centralized power control (CPC) schemes require some sort of central controller which has knowledge about all the radio links in the system. Therefore, they are not easy to implement. However, CPC schemes help in the design of distributed power control schemes that are easy to implement.

Early work on power control [1]–[3] centered on schemes which kept the received power at a constant level. These schemes have the advantage that the dynamic range requirements for the receiver are smaller, resulting in better adjacent channel protection. These schemes indicate an increase of system capacity by a factor roughly equal to two, relative to schemes with constant transmitted power. In [4] a CPC scheme that achieves the same CIR in all the radio links is proposed for a nonfading spread-spectrum system.

A CPC scheme is derived in [5] that has an optimal solution. This scheme was used to construct a distributed power control scheme [6], which converged to the optimal solution. In these schemes the CIR is controlled directly instead of controlling the received power.

In our work, we propose a CPC scheme that has the same optimal solution as the schemes in [5] and [6]. It lays the foundation for a distributed power control scheme [7] that converges to the same optimal solution. We analyze the scheme for the uplink (radio link from mobile to base). The same procedure is applicable to the downlink (radio link from base to mobile). Our scheme computes transmitter power to affect the CIR directly. That is, each mobile is assigned a transmitter power that adjusts its CIR to a common value.

Manuscript received November 9, 1992; revised January 19, 1993.
S. A. Grandhi, R. Vijayan, and D. J. Goodman are with WINLAB, Rutgers, The State University of New Jersey, Piscataway, NJ 08855-0909.
J. Zander is with Radio Communication Systems, Royal Institute of Technology, ELECTRUM 207, S-164 40 KISTA, Sweden.
IEEE Log Number 9209422.

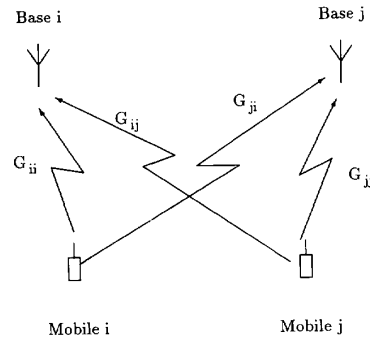


Fig. 1. Gain of the communication link between the i th base and the j th mobile.

In Section II we present the system model. The proposed power control scheme is presented and analyzed in Section III.

II. SYSTEM MODEL

We consider a cellular radio system with a finite channel (a frequency or a time slot) set of size N . The channels are reused in the system according to an arbitrary channel assignment scheme. M denotes the number of mobiles using a given channel. The transmitter power of mobile i is denoted by P_i . The M dimensional vector \mathbf{P} is the transmitter power vector for the mobiles in the given channel. We consider centralized power control for a given channel assignment.

Fading is not accounted for in our model, though the proposed CPC scheme is still applicable when the fading factor is included. It is assumed that the system is interference limited, and, therefore, noise is ignored. A mobile i uses the base station i which is closest to it for communication. The gain of the communication link between the i th base and the j th mobile is denoted by G_{ij} . This is illustrated in Fig. 1. All the G_{ij} 's are greater than zero. The carrier to interference ratio (CIR) of mobile i at its base station i is then given by

$$\gamma_i = \frac{P_i G_{ii}}{\sum_{\substack{j=1 \\ j \neq i}}^M P_j G_{ij}}, \quad 1 \leq i \leq M. \quad (1)$$

We define the quantity γ^- presented in [5] here again as

$$\gamma^- = \max_{\mathbf{P} \geq \mathbf{0}} \min_{1 \leq i \leq M} \{\gamma_i\} \quad (2)$$

where the notation $\mathbf{P} \geq \mathbf{0}$ is used to denote that all the elements of the M dimensional transmitter power vector \mathbf{P}

are nonnegative. We also define the quantity γ^+ as

$$\gamma^+ = \min_{\mathbf{P} \geq \mathbf{o}} \max_{1 \leq i \leq M} \{\gamma_i\}. \quad (3)$$

The next section describes a CPC scheme that achieves the same CIR for all the mobiles in each of the channels in the system.

III. CENTRALIZED POWER CONTROL

In this section, we describe a centralized power control scheme that maximizes in a given channel the minimum of the CIR's of all the mobiles using that channel. The CPC scheme is described and analyzed here for the uplinks. For the downlinks a similar procedure can be followed.

Equation (1) can be rewritten as

$$\gamma_i = \frac{P_i}{\sum_{j=1}^M A_{ij} P_j} \quad (4)$$

where

$$A_{ij} = \begin{cases} \frac{G_{ij}}{G_{ii}}; & \text{if } i \neq j \\ 0; & \text{if } i = j \end{cases} \quad (5)$$

Note that G_{ij}/G_{ii} is always greater than 0. Let us define \mathbf{A} as an $M \times M$ matrix that has A_{ij} as its elements. The $M \times M$ matrix \mathbf{A} has a few important properties which are described by the theorem and lemma that follow. The theorem is originally due to O. Perron and G. Frobenius [8]–[12] and is stated here without proof.

Theorem 1: Let \mathbf{A} be an $M \times M$ irreducible nonnegative matrix with eigenvalues $\{\lambda_i\}_{i=1}^M$. Then:

- 1) \mathbf{A} has a positive real eigenvalue λ^* with $\lambda^* = \max\{|\lambda_i|\}_{i=1}^M$.
- 2) λ^* above has an associated eigenvector \mathbf{P}^* with strictly positive entries.
- 3) λ^* has algebraic multiplicity equal to 1.
- 4) All eigenvalues λ of \mathbf{A} other than λ^* satisfy $|\lambda| < |\lambda^*|$ if and only if there is a positive integer k with all entries of \mathbf{A}^k strictly positive.
- 5) The minimum real λ such that the inequality

$$\lambda \mathbf{P} \geq \mathbf{A} \mathbf{P} \quad (6)$$

has solutions for $\mathbf{P} \geq \mathbf{o}$ is $\lambda = \lambda^*$.

- 6) The maximum real λ such that the inequality

$$\lambda \mathbf{P} \leq \mathbf{A} \mathbf{P} \quad (7)$$

has solutions for $\mathbf{P} \geq \mathbf{o}$ is $\lambda = \lambda^*$.

The notation $\mathbf{A} \geq \mathbf{B}$ is used to imply that each element in matrix \mathbf{A} is greater than or equal to the corresponding element in matrix \mathbf{B} .

We now present the lemma for the matrix \mathbf{A} .

Lemma 1: \mathbf{A} is an irreducible nonnegative matrix.

Proof: The matrix \mathbf{A} by definition has all the elements on its main diagonal equal to 0 and all other elements greater than 0. An $M \times M$ matrix \mathbf{B} is reducible if there exists a permutation matrix \mathbf{Q} such that

$$\mathbf{Q} \mathbf{B} \mathbf{Q}^T = \begin{pmatrix} \mathbf{C} & \mathbf{D} \\ \mathbf{O} & \mathbf{E} \end{pmatrix} \quad (8)$$

with \mathbf{C} $r \times r$ and \mathbf{E} $(M-r) \times (M-r)$ for $1 \leq r \leq M-1$. \mathbf{O} is a matrix with all its entries equal to zero. Matrix \mathbf{A} would be reducible only if it had at least one row with more than one 0 element. So \mathbf{A} is an irreducible nonnegative matrix.

In the centralized power control (CPC) scheme proposed here it is assumed that a central controller has knowledge about the signal strengths in all the radio links. In other words the central controller has knowledge of matrix \mathbf{A} . It then computes the eigenvector of the matrix \mathbf{A} as \mathbf{P}^* . The mobiles would then use the elements of \mathbf{P}^* as their transmitter powers to achieve γ^* in the system. For the CPC scheme we have the following proposition.

Proposition 1: There exists a unique γ^* given by

$$\gamma^* = \gamma^- = \gamma^+ \quad (9)$$

that may be achieved by all the M mobiles using a given channel and is given by

$$\gamma^* = \frac{1}{\lambda^*} \quad (10)$$

where λ^* is the largest real eigenvalue of the matrix \mathbf{A} . The power vector \mathbf{P}^* that achieves γ^* is the eigenvector corresponding to λ^* .

Proof: Let us define the quantities

$$\gamma_{\min} = \min_{1 \leq i \leq M} \{\gamma_i\} \quad \text{and} \quad \gamma_{\max} = \max_{1 \leq i \leq M} \{\gamma_i\}. \quad (11)$$

We have

$$\gamma_i \geq \gamma_{\min}, \quad i = 1, \dots, M. \quad (12)$$

Using (4) we can rewrite the above as

$$\frac{1}{\gamma_{\min}} P_i \geq \sum_{j=1}^M A_{ij} P_j, \quad i = 1, \dots, M. \quad (13)$$

The above can be expressed in matrix notation as

$$\lambda \mathbf{P} \geq \mathbf{A} \mathbf{P} \quad (14)$$

where

$$\lambda = \frac{1}{\gamma_{\min}}. \quad (15)$$

From Theorem 1 and Lemma 1 it follows that the minimum real λ such that the above set of inequalities will hold true is λ^* , which is the largest eigenvalue of \mathbf{A} that is positive and has \mathbf{P}^* as the corresponding eigenvector.

$$\mathbf{G} = \begin{pmatrix} 1.0 \times 10^{-4} & 4.82253 \times 10^{-9} & 3.57346 \times 10^{-10} \\ 1.52416 \times 10^{-8} & 6.25 \times 10^{-6} & 3.50128 \times 10^{-9} \\ 7.67336 \times 10^{-10} & 2.44141 \times 10^{-8} & 1.23457 \times 10^{-6} \end{pmatrix}.$$

We also have

$$\gamma_i \leq \gamma_{\max}, \quad i = 1, \dots, M. \quad (16)$$

Following the same procedure as above, we have

$$\lambda P \leq AP \quad (17)$$

where

$$\lambda = \frac{1}{\gamma_{\max}}. \quad (18)$$

Again from Theorem 1 and Lemma 1, the maximum real λ such that the above set of inequalities hold true is λ^* . So we have a γ^* that is achievable by all mobiles and $\gamma^* = \gamma^- = \gamma^+$. \square

It also follows from Theorem 1 and Lemma 1 that $\lambda^* > 0$ and, therefore, $\gamma^* > 0$. From the above proof for Proposition 1 we see that γ^* is achieved for the system with

$$\lambda^* P^* = AP^* \quad (19)$$

which implies that all the mobiles in this case will have the same CIR, γ^* .

The following example will illustrate the proposed CPC scheme. Consider three mobiles using the same channel with link gains given by the G matrix given at the bottom of the previous page.

Using equal transmitter powers, we obtain the CIR's of the three mobiles using (1) as 42.85 dB, 25.23 dB, and 16.90 dB, respectively. We next use transmitter powers according to the proposed CPC scheme (namely the elements of the eigenvector P^* of the corresponding A matrix) as 1.79189×10^{-3} , 8.67402×10^{-2} and 5.11641×10^{-1} , respectively. The corresponding CIR's of the three mobiles are all equal to 24.74 dB. We see an improvement of 7.84 dB in the minimum CIR.

IV. CONCLUSIONS

A centralized power control scheme which computes transmitter powers so as to have a common CIR for all the receivers has been presented. It is analyzed and shown to maximize the minimum of the CIR's and also to minimize the maximum of the CIR's for all the mobiles using the same channel.

REFERENCES

- [1] W. Tschirks, "Effects of transmission power control on the cochannel interference in cellular radio networks," *Electrotechnik und Informationstechnik*, vol. 106, nr 5 1989.
- [2] T. Fujii and M. Sakamoto, "Reduction of cochannel interference in cellular systems by intra-zone channel reassignment and adaptive transmitter power control," in *Proc. IEEE Veh. Technol. Conf., VTC-88*, 1988, pp. 668-672.
- [3] T. Nagatsu, T. Tsuruhara, and M. Sakamoto, "Transmitter power control for cellular land mobile radio," in *Proc. IEEE GLOBECOM 1983*, pp. 1430-1434.
- [4] R. W. Nettleton and H. Alavi, "Power control for spread-spectrum cellular mobile radio system," in *Proc. IEEE Veh. Technol. Conf., VTC-83*, 1983, pp. 242-246.
- [5] J. Zander, "Optimum transmitter power control in cellular radio systems," Internal Report TRITA-TTT-9101, Jan. 8, 1991.
- [6] J. Zander, "Distributed cochannel interference control in cellular radio systems," *IEEE Trans. Veh. Technol.*, vol. 41, Aug. 1992.
- [7] S. A. Grandhi, R. Vijayan, and D. J. Goodman, "A distributed algorithm for power control in cellular radio systems," presented at the *30th Annual Allerton Conf. Commun., Control, Computing*, Monticello, Illinois, Sept. 30-Oct. 2, 1992.
- [8] B. Noble and J. Daniel, *Applied Linear Algebra*, 3rd ed. Englewood Cliffs, NJ: Prentice-Hall, 1988, pp. 375-376.
- [9] J. J. Hunter, *Mathematical Techniques of Applied Probability*, vol. 1, "Discrete Time Models: Basic Theory." New York: Academic, 1983.
- [10] F. R. Gantmacher, *The Theory of Matrices*, vol. 2. New York: Chelsea, 1964.
- [11] R. Bellman, *Introduction to Matrix Analysis*. New York: McGraw-Hill, 1960.
- [12] Henryk Minc, *Nonnegative Matrices*. New York: Wiley, 1988.



Sudheer A. Grandhi was born in Madras, India, on September 25, 1965. He received the B.Tech. and M.S. degrees from the Indian Institute of Technology, Madras, in 1986 and 1990, respectively. He is currently working on the Ph.D. degree at the Department of Elec. and Comp. Eng., Rutgers University, New Jersey.

From 1986 to 1987, he was a Programmer at Tata Consultancy Services, India. He was a Research Scholar from 1987 to 1989 at the Indian Institute of Technology, Madras, working on indoor wireless communications. Since 1990 he has been a Research Assistant at the Wireless Information Network Laboratory (WINLAB), Rutgers University, working on resource allocation for multiuser radio networks.

Rajiv Vijayan, for a photograph and biography, please see page 356 of the August 1993 issue of this TRANSACTIONS.



David J. Goodman (M'67-SM'86-F'88) received the bachelor's degree from Rensselaer Polytechnic Institute, the Master's degree from New York University, and the Ph.D. degree from Imperial College, University of London, all in electrical engineering.

He is Director of the Wireless Information Network Laboratory (WINLAB), a National Science Foundation Industry University Cooperative Research Center at Rutgers, The State University of New Jersey. He is also a Professor of Electrical and Computer Engineering at Rutgers. Prior to joining the University in 1988, he enjoyed a 20-year research career at AT&T Bell Laboratories, where he was a Department Head in the Communication Systems Research Laboratory. His research has produced fundamental contributions to digital signal processing, speech coding, and wireless information networks.

Dr. Goodman is a Fellow of the Institution of Electrical Engineers (London).



Jens Zander (S'82-M'85) was born in Lütjenburg, Germany, in 1955. He received the M.S degree in electrical engineering and the Ph.D degree from Linköping University, Sweden, in 1979 and 1985, respectively.

From 1985 to 1989 he was a partner of SECTRA, a research and development consultant firm, where he managed several projects involving military and aerospace communication systems. In 1989 he became Professor of Radio Communication Systems at the Royal Institute of Technology, Stockholm, Sweden. Since 1992 he has served as Senior Scientific Advisor to the Swedish National Defense Research Establishment and on the board of TERACOM, the main Swedish broadcasting operator. He also serves as consultant to government agencies and industry on spectrum allocation issues. His current research interests include high-capacity personal communication systems, advanced HF-communication systems, and systems for digital broadcasting.

Dr. Zander is an Associate Member of Sections C and GH of the Swedish URSI Committee.